



The Evolution of Grinding

**Best prospects
for your business**

Latest technologies


Prompt assistance

Discover all the information about Klinsystem and the advantages of working with the most advanced technologies made available by our company.

www.klinsystem.com



LB 38GR REMOTE CONTROL

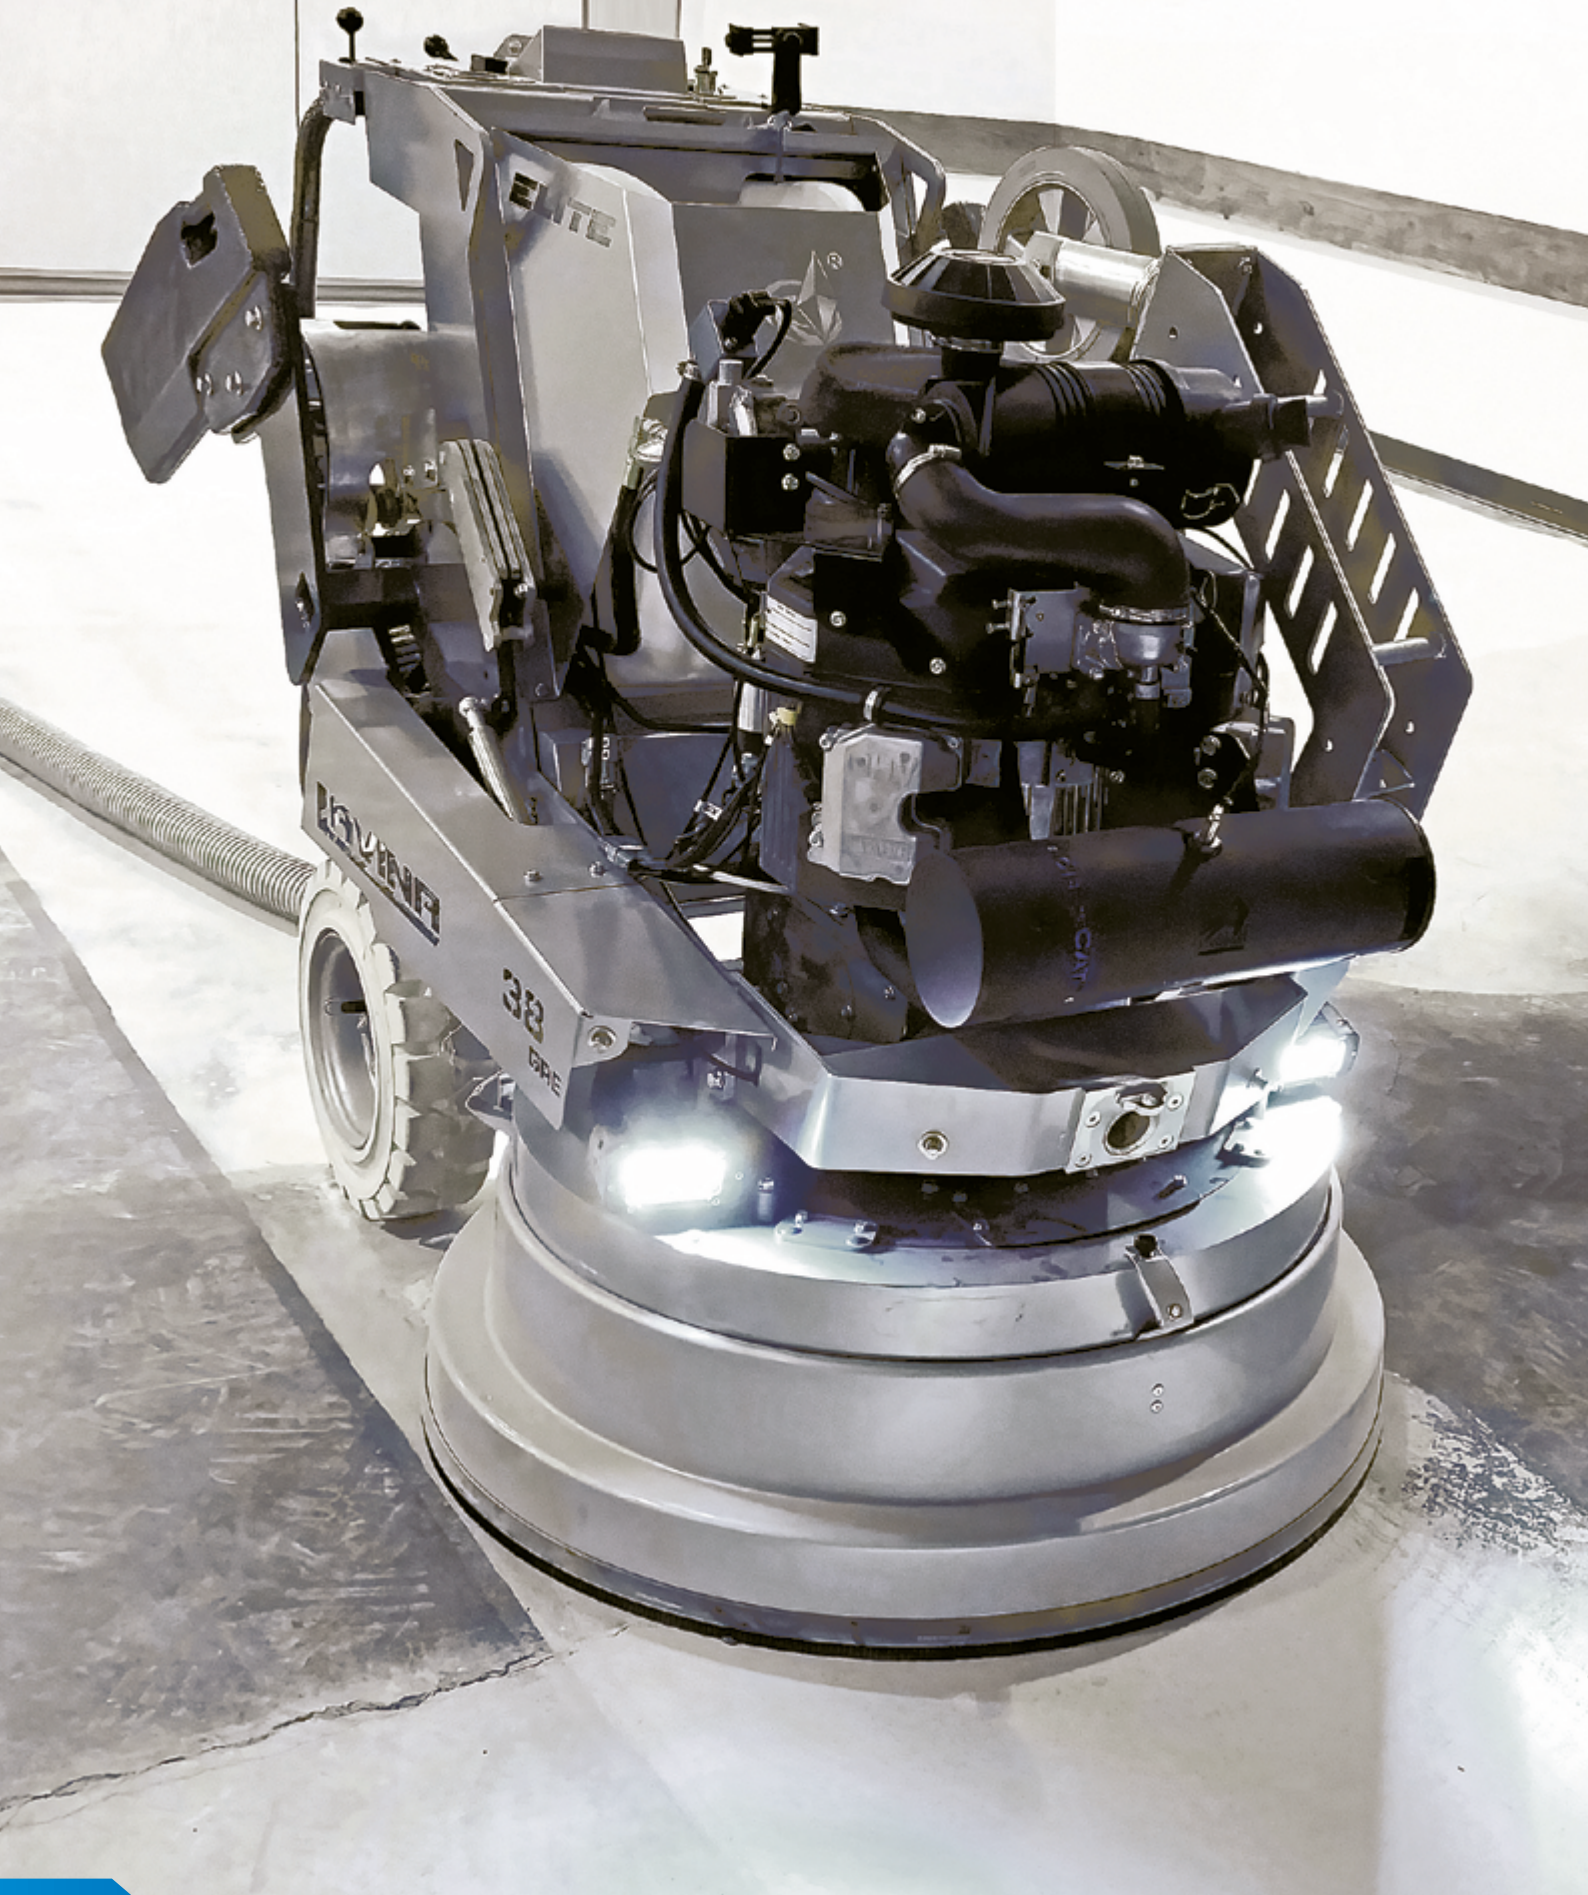

LB 38GR REMOTE CONTROL

ELITE
S E R I E S



← WORKING WIDTH Ø 950mm →

Dust-Proof grinding head with low-friction chain gear planetary drive.



INTUITIVE TOUCHSCREEN PANEL / HMI

New HMI provides essential operating information and implements operators' instructions.

- Indications of power supply and power consumption
- Machine load and hours worked
- Tool holder rpm and option to choose rpm setting with tool input
- Water supply and lights activation
- Maintenance reminders



NEW INTELLIGENT REMOTE CONTROL

Precise control over the machine two sensitive thumbsticks control its position and offset, including integrated mapping on the offset. A wide range of functions. Super light and easy to use with ergonomic rubber grip. RC Battery (rechargeable) AA 1,2V

Integrated weight system



Heavy-duty
THIRD WHEEL

L38GRE three heads planetary floor grinder working section 950mm fitted with Kawasaki FX1000V 999cc propane motor 26 Kw 35 Hp with **new intelligent remote control**. Total weigh of machine 719 Kg.

Combines the convenience of a remote control with the flexibility of a powerful propane engine and ease of use of a planetary grinder to offer one of the highest grinder productivity rates in the industry. Ideal for large commercial projects, where power may not be available.

Improved dust collection: adjustable skirt with a flexible brush for better dust containment. The vacuum hose connection is closer to the dust source and utilizes a metal camlock attachment. Convenient **integrated lift points** for moving the machine with a forklift.

2 Led Lights in front and 1 back of machine for monitoring the floor. **Charging phone station** with dual USB port.

Durable **stainless steel cup holder**. **New handle bar** with multiple handle positions. Propane tank capacity 15Kg.

L38GR PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	40 - 45
Floor Preparation 1 Step	160 - 220
Polishing Terrazzo 5 Step	45 - 60
Resin, varnish and coating removal 1 Step	200 - 300
Grinding and Polishing Marble 5 Step	30 - 50
Grinding and Polishing Granite 7 Step	20 - 30

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	26 Kw - 35 Hp	Tool connection	Quick Change
Working Width	950 mm	Tool holder diameter	3 x 330mm/13"
Engine	Kawasaki Propane	Application	Wet / Dry
Weight	719 Kg	Dust-vacuum	Yes
Engine capacity	999 cc	Water Tank capacity	46 Lt
Variable Speed	2000 - 3600 rpm	Code	L38GREB
		Price	€ 43.820,00

L32R REMOTE CONTROL


ELITE
SERIES



L 32R Three heads professional floor grinder fitted with a powerful 15 Kw - 20 Hp Siemens motor equipped with **New Remote Control System**. Suitable for grinding and polishing Concrete and Natural Stone surfaces on large areas.

Thanks to the forced counter rotating planetary system (820mm) provide a considerable saving of labor and work time. Equipped with **4-position weight adjustment system** to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure. It also facilitates the transport and tilting of the machine for tool change. Wide pneumatic wheels allow easy maneuverability on the work area, good grip and no marks on the floor.

The machine is **equipped with a special battery system** which allows you to move the machine without problems on site without connecting the electric cable. This also simplifies the loading and unloading operations.



WORKING WIDTH \varnothing 850mm



INTUITIVE TOUCHSCREEN PANEL / HMI

New HMI provides essential operating information and implements operators' instructions.

- Indications of power supply and power consumption
- Machine load and hours worked
- Tool holder rpm and option to choose rpm setting with tool input
- Water supply and lights activation
- Maintenance reminders



NEW INTELLIGENT REMOTE CONTROL

Precise control over the machine two sensitive thumbsticks control its position and offset, including integrated mapping on the offset. A wide range of functions. Super light and easy to use with ergonomic rubber grip. **RC Battery (rechargeable) AA 1,2V**

L32R PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	25 - 30
Floor Preparation 1 Step	100 - 130
Polishing Terrazzo 5 Step	30 - 40
Resin, varnish and coating removal 1 Step	100 - 150
Grinding and Polishing Marble 5 Step	20 - 30
Grinding and Polishing Granite 7 Step	10 - 15

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	15 Kw - 20 Hp	Tool connection	Quick Change
Working Width	850 mm	Tool holder diameter	3 x 330 mm / 13"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	710 Kg	Dust-vacuum	Yes
Amperage	Max 32 Amp	Water Tank capacity	46 Lt
Variable Speed	300 - 1300 rpm	Code	L3213REUB
		Price	€ 36.350,00

L32 R REMOTE CONTROL



NEW 3RD WHEEL AND LARGER TIRES

L32 20Hp

ELITE
SERIES

Integrated weight system





L 32 Three heads planetary floor grinding and polishing machine. Fitted with 15 Kw - 20 Hp - 400 V motor. The most performing machine of this segment.

Suitable for grinding and polishing marble, terrazzo, granite and concrete floors. Also ideal for floor preparation, bush-hammering and coatings removal. Equipped with **4-position weight adjustment system** to allow to balance the weight of the machine forward or backward to increase or decrease the working pressure.

New 3rd wheel included with the machine.

Very powerful and heavy machine for working on large areas, with total weight of more than 685 kg. Good choice for professionals.

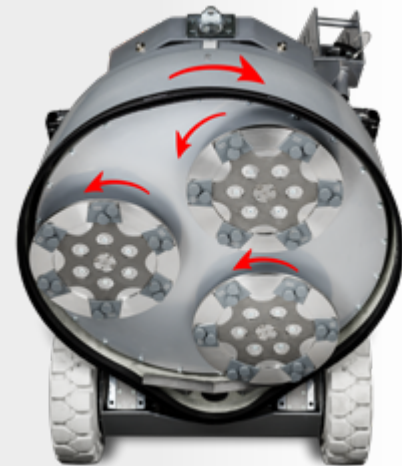

WORKING WIDTH \varnothing 850mm



CHARGING PHONE STATION WITH DUAL USB 2.0 PORT

3.15 Amps for faster charging with a shutoff when charge is complete and new durable stainless steel cup holder.



TWO LED LIGHTS FOR MONITORING THE FLOOR

A detachable LED light (with a magnet) improves visibility, and a second LED light attached in the back of the machine near the floor helps monitor the scratch pattern.

L32 PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	25 - 30
Floor Preparation 1 Step	100 - 130
Polishing Terrazzo 5 Step	30 - 40
Resin, varnish and coating removal 1 Step	100 - 150
Grinding and Polishing Marble 5 Step	20 - 30
Grinding and Polishing Granite 7 Step	10 - 15

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	15 Kw - 20Hp	Tool connection	Quick Change
Working Width	850 mm	Tool holder diameter	3 x 330 mm / 13"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	685 Kg	Dust-vacuum	Yes
Amperage	Max 32 Amp	Water Tank capacity	46 Lt
Variable Speed	300 - 1300 rpm	Code	L3213EUB
		Price	€ 23.820,00

L 30L 15Hp

ELITE SERIES



WORKING WIDTH Ø 770mm



EASY TO USE INTEGRATED WEIGHTS

Equipped with 4-position weight adjustment system to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.



NEW ADJUSTABLE HANDLE BAR

Multiple handle positions for more convenient operation and transportation. Make sure the handle position is locked when moving or using the machine.



Integrated weight system

Low-Profile Base

L 30L Three heads planetary floor grinding machine fitted with 11 Kw - 15 Hp - 400 V motor. With 770mm working section is the most versatile and selling machine. Auto levelling planetary system. Heavy machine with total weight of more than 390 kg.

The machine has low flange that allows for grinding and polishing under racks at 1- 4 cm. Such solution applied for its casing makes it possible to avoid manual processing during works in market stores and warehouses.

Equipped with **4-position weight adjustment system** to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.

L30L PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	25 - 30
Floor Preparation 1 Step	100 - 130
Polishing Terrazzo 5 Step	30 - 40
Resin, varnish and coating removal 1 Step	100 - 150
Grinding and Polishing Marble 5 Step	20 - 30
Grinding and Polishing Granite 7 Step	9 - 12

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	11 Kw - 15 Hp	Tool connection	Quick Change
Working Width	770 mm	Tool holder diameter	3 x 330 mm / 13"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	390 Kg	Dust-vacuum	Yes
Amperage	Max 30 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L30LEUB

Price € 19.790,00

L25 R REMOTE CONTROL



L 25R REMOTE CONTROL**ELITE**
SERIES

WORKING WIDTH Ø 660mm


**INTUITIVE TOUCHSCREEN PANEL / HMI**

New HMI provides essential operating information and implements operators' instructions.

- Indications of power supply and power consumption
- Machine load and hours worked
- Tool holder rpm and option to choose rpm setting with tool input
- Water supply and lights activation
- Maintenance reminders

**NEW INTELLIGENT REMOTE CONTROL**

Precise control over the machine two sensitive thumbsticks control its position and offset, including integrated mapping on the offset. A wide range of functions. Super light and easy to use with ergonomic rubber grip.

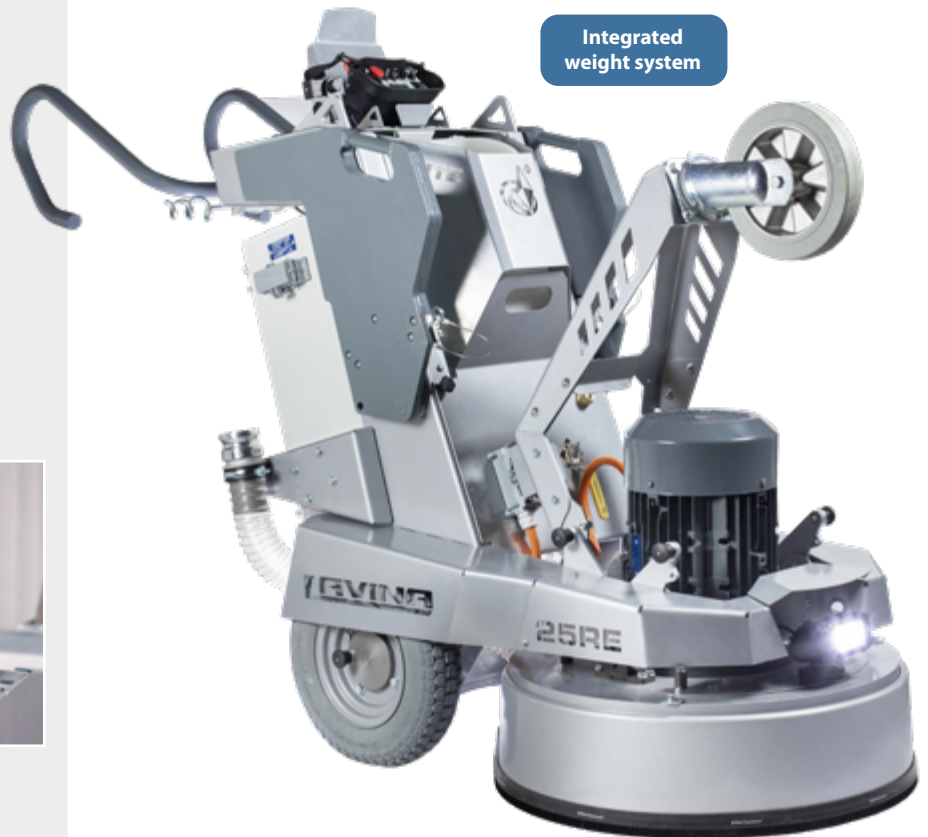

Integrated weight system

L 25R Three heads planetary floor grinder fitted with 7,5 Kw 10 Hp motor with new intelligent remote control. Total weight of machine 557 kg.

Suitable for grinding and polishing marble, terrazzo, granite and concrete floors. Also ideal for floor preparation, bush-hammering and coatings removal. Machine speed and its rotational speed can be adjusted quickly and easily using the control panel. Very good choice for professionals working on large areas.

Single person is able to operate with the vacuum and the grinder problem-free. Equipped with **4-position weight adjustment system** to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.

L25R PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	20 - 25
Floor Preparation 1 Step	50 - 100
Polishing Terrazzo 5 Step	20 - 30
Resin, varnish and coating removal 1 Step	80 - 120
Grinding and Polishing Marble 5 Step	12 - 25
Grinding and Polishing Granite 7 Step	8 - 10

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	7,5 Kw - 10 Hp	Tool connection	Quick Change
Working Width	660 mm	Tool holder diameter	3 x 235 mm / 9"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	557 Kg	Dust-vacuum	Yes
Amperage	Max 15 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L25REUB
		Price	€ 29.280,00

L 25L 15Hp

ELITE
SERIES



Integrated weight system



WORKING WIDTH \varnothing 660mm



NEW PLANETARY SYSTEM

New chain driven forced planetary system, designed to provide more durable rotation and reduce the maintenance, resulting in **higher efficiency and productivity**. Completely redesigned frame delivers **superior maneuverability and easy tool changes**.

Dust-proof grinding head with low-friction chain gear planetary drive protects internal components from dust and moisture, which **reduces maintenance and increases service life**.

The chain has been upgraded on 20"/25"/30" models.

L 25L Three heads planetary grinding and polishing machine with 11 Kw - 15 Hp motor, designed for use in larger projects. For concrete, marble and granite grinding and polishing, coatings removal and floor preparation.

Heavy and efficient, simple to use and easy to transport. Equipped with **4-position weight adjustment system** to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.

Two led lights for monitoring the floor: a detachable LED light (with a magnet) improves visibility, and a second LED light attached in the back of the machine near the floor helps monitor the scratch pattern.

L 25L PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	20 - 25
Floor Preparation 1 Step	50 - 100
Polishing Terrazzo 5 Step	20 - 30
Resin, varnish and coating removal 1 Step	80 - 120
Grinding and Polishing Marble 5 Step	12 - 25
Grinding and Polishing Granite 7 Step	8 - 10

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	11 Kw - 15 Hp	Tool connection	Quick Change
Working Width	660 mm	Tool holder diameter	3 x 235 mm / 9"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	355 Kg	Dust-vacuum	Yes
Amperage	Max 30 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L25LEUB
		Price	€ 18.380,00

L 25 10Hp

ELITE
SERIES

CHARGING PHONE STATION WITH DUAL USB 2.0 PORT
3.15 Amps for faster charging with a shutoff when charge is complete and new durable stainless steel cup holder.



INTEGRATED LIFT POINTS
New lift points design facilitates moving the machine with a forklift.

EASY TO USE INTEGRATED WEIGHTS
Equipped with 4-position weight adjustment system to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.

Integrated
weight system

L 25 Three heads planetary machine for grinding and polishing. Fitted with 7,5 Kw - 10 Hp motor. Ideal for grinding and polishing marble, terrazzo, granite and concrete floors.

Also suitable for floor preparation, bush-hammering and coatings removal. Powerful machine with total weight of more than 345 kg. Good choice for professionals, perfect for areas up to 1.000 m².

Equipped with **4-position weight adjustment system** to allows to balance the weight of the machine forward or backward to increase or decrease the working pressure.

Two led lights for monitoring the floor: a detachable LED light (with a magnet) improves visibility, and a second LED light attached in the back of the machine near the floor helps monitor the scratch pattern.

L25 PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	20 - 25
Floor Preparation 1 Step	50 - 100
Polishing Terrazzo 5 Step	20 - 30
Resin, varnish and coating removal 1 Step	80 - 120
Grinding and Polishing Marble 5 Step	12 - 25
Grinding and Polishing Granite 7 Step	8 - 10

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	7,5 Kw - 10 Hp	Tool connection	Quick Change
Working Width	660 mm	Tool holder diameter	3 x 235 mm / 9"
Voltage	380 - 400 V - 50 Hz	Application	Wet / Dry
Weight	345 Kg	Dust-vacuum	Yes
Amperage	Max 15 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L25EUB
		Price	€ 16.750,00

L 20N 7.5Hp

ELITE
SERIES



WORKING WIDTH Ø 510mm



NEW PLANETARY SYSTEM

New chain driven forced planetary system, designed to provide more durable rotation and reduce the maintenance, resulting in higher efficiency and productivity. Completely redesigned frame delivers superior maneuverability and easy tool changes. Dust-proof grinding head with low-friction chain gear planetary drive protects internal components from dust and moisture, which reduces maintenance and increases service life. The chain has been upgraded on 20"/25"/30" models.



INTEGRATED WEIGHTS SYSTEM

Equipped with 4-position weight adjustment system to allow to balance the weight of the machine forward or backward to increase or decrease the working pressure.

L 20N Three heads planetary grinder suitable for grinding and polishing. Fitted with **7,5 Hp 380 V motor**. Is the most performing machine of this segment.

Ideal for grinding and polishing marble, terrazzo, granite and concrete floors. Also suitable for floor preparation, bush-hammering, old glues and coating/resin removal. **Quick release of planetary head** for easy transport. **New adjustable handle bar** with multiple handle positions for more convenient operation and transportation.

Heavy machine with total weight of more than 265 kg. Good choice for professionals with task to cover a surface of up to 500/800 m².

L 20N PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	10 - 15
Floor Preparation 1 Step	40 - 80
Polishing Terrazzo 5 Step	9 - 15
Resin, varnish and coating removal 1 Step	40 - 60
Grinding and Polishing Marble 5 Step	10 - 15
Grinding and Polishing Granite 7 Step	6 - 10

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	5,5 Kw - 7,5 Hp	Tool connection	Quick Change
Working Width	510 mm	Tool holder diameter	3 x 235 mm / 9"
Voltage	380 V - 50 Hz	Application	Wet / Dry
Weight	265 Kg	Dust-vacuum	Yes
Amperage	Max 15 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L2ONEUB
		Price	€ 10.690,00



WORKING WIDTH \varnothing 510mm



NEW ADJUSTABLE HANDLE BAR

Multiple handle positions for more convenient operation and transportation. Make sure the handle position is locked when moving or using the machine.

IMPROVED DUST COLLECTION EFFICIENCY

Adjustable skirt with a flexible brush for better dust containment. Also, the vacuum hose connection is now closer to the dust source, and utilizes a metal camlock attachment.



TWO LED LIGHTS FOR MONITORING THE FLOOR



ELITE
SERIES

VARIABLE SPEED
300-1300 rpm

Single Phase
230 V 4 Hp

L 20 Three heads planetary grinder suitable for grinding and polishing marble, terrazzo, granite and concrete floors. The machine can working in both large and narrow areas like bathrooms and kitchens. Powerful **4 Hp motor single-phase with weight of 200 kg.**

Quick release of planetary head for easy transport. The machine is easy to transport, very simple and convenient to use. Completely re-designed frame delivers superior maneuverability and easy tool changes.

Convenient **integrated lift points** for moving the machine with a forklift. This model has attracted many supporters all over the world and is the most popular choice in small-size machine segment.

L20 PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	8 - 12
Floor Preparation 1 Step	40 - 60
Polishing Terrazzo 5 Step	10 - 15
Resin, varnish and coating removal 1 Step	40 - 60
Grinding and Polishing Marble 5 Step	8 - 12
Grinding and Polishing Granite 7 Step	3 - 5

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	3 Kw - 4 Hp	Tool connection	Quick Change
Working Width	510 mm	Tool holder diameter	3 x 235 mm / 9"
Voltage	230 V - 50/60 Hz	Application	Wet / Dry
Weight	200 Kg	Dust-vacuum	Yes
Amperage	Max 14 Amp	Water Tank capacity	20 Lt
Variable Speed	300 - 1300 rpm	Code	L20EUB
Price		€ 8.890,00	

L 16 220V

ELITE
SERIES





VARIABLE SPEED
300-900 rpm

Single Phase
230 V 3 Hp

Quick release of the head
for easy transport

L 16 Three heads planetary grinder suitable for grinding and polishing marble, granite, concrete, wooden floors also suitable for floor preparation, glue and resin removal on small areas. Ideal to work in residential areas. Dust proof grinding head with 3x7" discs and forced planetary drive.

L16 can be used in both small and narrow areas like bathrooms and kitchens. **Powerful 4 Hp motor single-phase** can be loaded with 2 extra weights (2 x 8 Kg OPTIONAL). Cord extension not included.

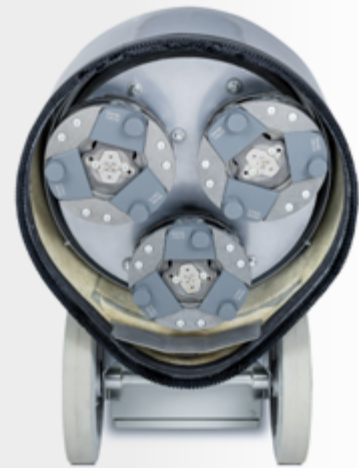

WORKING WIDTH Ø 420mm



FOLDABLE FRAME AND COMPACT DESIGN

L16 is easy to handle and storage, the machine can be divided in two pieces and transported even in a small car. Head 68 kg - Carriage 30 kg. Dustproof grinding head with 3 x 178mm tool holders Forced planetary drive.



L 16 PRODUCTIVITY RATES* - Sqm/H

Grinding and Polishing Concrete 7 Step	5 - 8
Floor Preparation 1 Step	25 - 40
Polishing Terrazzo 5 Step	5 - 8
Resin, varnish and coating removal 1 Step	15 - 30
Grinding and Polishing Marble 5 Step	5 - 8
Grinding and Polishing Granite 7 Step	3 - 5

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.

TECHNICAL DATA

Power	2,2 Kw - 4 Hp	Tool connection	Quick Change
Working Width	420 mm	Tool holder diameter	3 x 178 mm / 7"
Voltage	230 V - 50/60 Hz	Application	Wet / Dry
Weight	98 Kg	Dust-vacuum	Yes
Amperage	Max 12 Amp		
Variable Speed	300 - 900 rpm	Code	L16EU
		Price	€ 6.450,00


L 14 EDGE GRINDER

ELITE

SERIES



WORKING WIDTH \varnothing 335mm

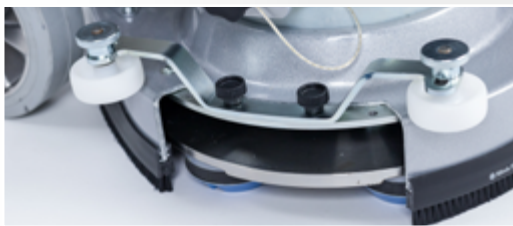

REMOVABLE LATERAL INLET
allows the L14 to be used as edge grinder.



HEAD 35 KG CARRIAGE 25 KG



Adjustable handle bar
to use as edger machine

VARIABLE SPEED
400-1000 rpm

Single Phase
230 V 3 Hp

Quick release of the head
for easy transport

L 14 Powerful and versatile single disc floor grinder suitable for floor grinding and floor preparation, glue and resin removal. Ideal to work in small residential, commercial project and industrial areas. Powerful 4 Hp motor single-phase. Foldable frame and compact design.

L 14 is easy to handle and storage. **The removable lateral inlet allows the L 14 to be used as edge grinder.** The machine can be divided in two pieces and transported even in a small car: Head 35 kg - Carriage 25 kg. Dust-proof grinding head protects internal components from dust and moisture which reduces maintenance and increases service life. Flexible brush for better dust containment. Cord extension not included.

TECHNICAL DATA

Power	2,2 Kw - 4 Hp	Tool connection	Quick Change
Working Width	335 mm	Tool holder diameter	1 x 335 mm / 13"
Voltage	230 V - 50/60 Hz	Application	Wet / Dry
Weight	63 Kg	Dust-vacuum	Yes
Amperage	Max 12 Amp		
Variable Speed	400 - 1000 rpm	Code	L14EU

Price € 4.850,00

L 14 PRODUCTIVITY RATES* - Sqm/H

Concrete grinding 1 Step	40 - 50
Terrazzo grinding 1 Step	60 - 90
Glue removal 1 Step	30 - 40
Paint removal 1 Step	20 - 40

*production rates may vary according to the surface conditions, diamond tools used, equipments, operator, etc.




Full range of Floor Grinding machines Industrial Vacuums and Diamond tools

Klinsystem is able to offer to your company the best prospects of business, the latest technologies in this field and the assistance for the development of your company. Discover all information about Klinsystem and the advantages of working with the most advanced technologies made available by our company.

PERFORMANCE ABOVE THE REST.

A photograph showing a row of industrial floor grinding machines in a large, well-lit factory or warehouse. The machines are white and grey, with various components like wheels and grinding heads visible. They are parked on a highly reflective, polished floor that mirrors the overhead lights and the machines themselves. The background shows the industrial structure of the building with high ceilings and structural beams.

ELITE
S E R I E S

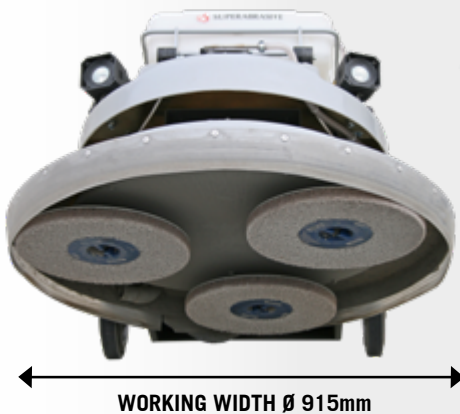LB 36G PROPANE BURNISHER**ELITE**
SERIES

- Powerful Kawasaki engine
- Forced planetary drive with 3x356mm heads
- Optimal pad pressure + flexible head design
- Superior dust collection



High speed 3 heads
planetary system

LB 36G PROPANE BURNISHER First in the world three heads high-speed planetary machine. Fitted with Kawasaki 13 Kw propane motor. It can be used in closed rooms thanks to application of catalyst installed on the motor. The machine has an integrated dust container. Planetary system and soft heads enable wide use of various tools for light polishing, honing, polishing and daily cleaning of surfaces. A low-profile base for buffing and polishing under racks.

High productivity of the machine allows works to be carried out much faster than using a standard single head or a heavy duty rotary machine. Very popular model in the U.S. Perfect for keeping large polished concrete areas clean.

LB 36G has no limitations due to cables or lack of electric power. Heavy duty transmission. No performance drop and loss of time caused by the power griding.

TECHNICAL DATA

Power	13 Kw - 18 Hp	Tool connection	Quick Change
Working Width	915 mm	Tool holder diameter	3 x 356 mm / 14"
Engine	Kawasaki Propane	Application	Wet / Dry
Weight	280 Kg	Dust-vacuum	Yes
Engine capacity	603 cc	Water Tank capacity	20 Lt
Variable Speed	2000 - 3000 rpm	Code	LB36G
		Price	€ 15.550,00

Concrete POLISHING SYSTEM

COATING REMOVAL

Carbide Scrapers for thick glue removal (pag. 22). PCD segmented tools with a metal button or sacrificial bars for coating removal. Recommended speed 550-650 rpm.

GRINDING / FLOOR PREPARATION

- Select the proper Metal bond based on the concrete hardness.
 - Select between single or double button depending on the machine size (*More info pag. 22-24*).
 - Start with grit 30 to expose Large aggregate.
 - Start with grit 70 to expose Medium aggregate.
 - Start with grit 120 for Salt & Pepper.
- Recommended speed 550-650 rpm.

DENSIFIER

Concrete Hardner KS10 Sodium/Potassium Densifier to improve the hardness and quality of new and existing concrete floors (*Instruction pag. 61*).

HONING

Grit 100 Hybrid - HD Copper, Calibra or Corsa (pag. 27). Hybrids tools are ideal as transition step between metals and resins. Continue with grit 200 and grit 400 Hybrid or Resin (pag. 26). Recommended speed 650-750 rpm.

COLORING

Concrete Color Dye (Powder)

Concentrate colour powder to be dilute in 4 liters of Acetone (*Instruction pag. 62*).

POLISHING

Polish with V-HARR resin bond discs grit 800 and grit 1800. Recommended speed 800-1100 rpm.

SEALER

Concrete Guard Lithium

glossy stain protection sealer, oil-repellent. Can be applied directly on the floor by using microfiber cloth. After application, polishing the surface with high speed machine (pag. 61).

BURNISHING

Burnish with **Shine Pro BUFF** diamond floor pad specially designed for burnishing and polishing concrete floors (pag. 33-35).



Concrete Hardner Lithium

Lithium densifier High concentration, excellent oil-repellent, does not create film
- *Instruction pag. 59*



HD COPPER
grit 100



CALIBRA
grit 100



NATO CONCRETE
grit 200



NATO CONCRETE
grit 400




Concrete Color Plus (Liquid)

Concentrated liquid color solution to be diluted in 4 liters of Acetone
- *Instruction pag. 62*



V-HARR
grit 800



V-HARR
grit 1800



Marble POLISHING SYSTEM

GRINDING

Start grinding WET with SA SUPERTHICK metal bond discs grit 46, 70, 120. Recommended speed 550-650 rpm.

HONING

Continue WET with Spiral resin discs grit 220 and grit 400. Recommended speed 650-750 rpm.

POLISHING

Continue WET with NATO STONE resin bond discs grit 800 and grit 1800. Recommended speed 800-1100 rpm.

POLISH POWDER

As a final step for high gloss, use the most specific POLISH POWDER KS for marble in according to the kind of floor with PADLUX Natural fibers floor pads (*More info pag. 66*).

CLEANING AND SEALING

Wash the floors with water and Klinsoap to protect the surface and to improve the gloss (pag. 65). High quality combination cleaner that forms a water insoluble and dirt repellent barrier.



SA SUPERTHICK
Metal Bond



SPIRAL
grit 220



SPIRAL
grit 400



NATO STONE
grit 800



NATO STONE
grit 1800



Klinsoap

Dilute by 0,5 liters every 10 liters of water for daily cleaning and increase to 1-2 liters per 10 liters for added sealing impregnation effect.

Terrazzo POLISHING SYSTEM

GRINDING

Start grinding WET with SA SUPERTHICK metal bond diamond discs, grit 46 and grit 70. For terrazzo restoration start with grit 70. Recommended speed 550-650 rpm.

GROUTING

For cementitious terrazzo use densifier Concrete Hardner KS10 after grit 70 or before grit 100. Dry the surface and apply grout if needed, taking care to fill cracks (*More info pag. 63*).

FINE GRINDING

Grinding WET with SA SUPERTHICK discs grit 120 until all grout is removed from surface. If grout was not used on the floor, use CALIBRA grit 100, wet. Recommended speed 550-650 rpm.

HONING

Continue WET with NATO STONE resin bond discs grit 200 and grit 400. Recommended speed 650-750 rpm.

POLISHING

Polish with V-HARR resin bond discs grit 800 and grit 1800. Recommended speed 800-1100 rpm.

POLISH POWDER

As a final step for high shine, use **Polish Powder Mosaic** with PADLUX Natural fibers floor pads ideal for mosaic, terrazzo and palladiana floors (*More info pag. 70*).



SA SUPERTHICK
Metal Bond



POLYESTER MASTIC for
marble and terrazzo.



SA Superthick
grit 120



CALIBRA
grit 100




NATO STONE
grit 200



NATO STONE
grit 400



V-HARR
grit 800



V-HARR
grit 1800



CLEANING AND SEALING

Wash the floors with water and **Klinsoap** to protect the surface and to improve the gloss. (*More info pag. 65*).

Floor Preparation

PCD TOOLS


Ideal for coating removal and preparation for epoxy. Offered with and without a metal button or sacrificial bars.

PCD's without metal button or sacrificial bars are very aggressive and designed for thick coating removal. They will leave a very coarse profile on the concrete floor.

PCD's with a metal button or sacrificial bars are less aggressive and are designed for thin coating removal.

Important:

PCD tools are direction specific. Always check the direction of rotation of the grinding heads.

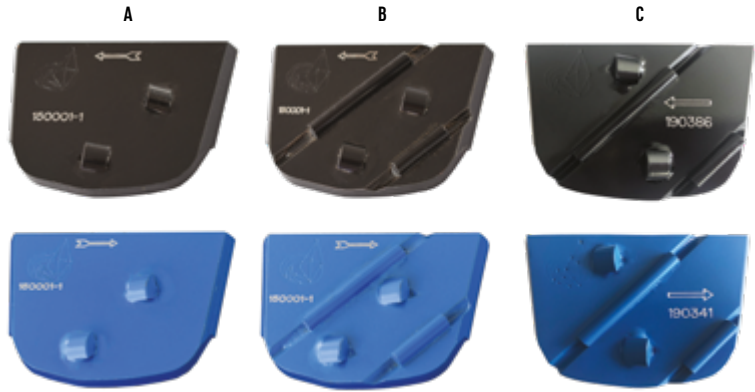

more aggressive →

CODE	DESCRIPTION	PRICE
EPCD	QC Trapezoid tool with 2 PCD segments	€ 86,00
EPCDSB	QC Trapezoid tool with 2 PCD segments and sacrificial bars	€ 105,00
X1B-PCD2	QC Trapezoid tool with 2 PCD segments and round metal button grit 30	€ 150,00

QUICK CHANGE METAL BOND TOOLS

Our Quick Change system features replaceable trapezoid-style pads that easily slide in and out of the machine plates or heads, with no bolting required. Quick Change tools are offered in separate bonds for soft, medium, hard, super hard and extra hard concrete floors.







TOOLING TIPS

- Use the rectangular 2 segments tools for a more aggressive cut and for no-cementitious coating removal.
- Use the round 2 buttons tools for cementitious coating removal.
- Use single round button tools with lighter machines (under 25").
- Use double segment tools with heavier machines 25" and up.
- For a more aggressive cut, use the single rectangular segment tools during the first grinding step on all machines (tool life can vary based on the concrete hardness).

Floor Preparation





SOFT CONCRETE

MOHS scale 2-3 - Concrete with a PSI under 2500 is considered soft / abrasive. We recommend to use Yellow bond.

	CODE	DESCRIPTION			GRIT	PRICE
	X1B-SC-0014	Quick Change	One button	for SOFT/ABRASIVE concrete	14	€ 49,50
	X1B-SC-0030	Quick Change	One button	for SOFT/ABRASIVE concrete	30	€ 37,50
	X1B-SC-0050	Quick Change	One button	for SOFT/ABRASIVE concrete	50	€ 37,50
	X1B-SC-0070	Quick Change	One button	for SOFT/ABRASIVE concrete	70	€ 37,50
	X1B-SC-0120	Quick Change	One button	for SOFT/ABRASIVE concrete	120	€ 37,50
	X2B-SC-0014	Quick Change	Two buttons	for SOFT/ABRASIVE concrete	14	€ 82,00
	X2B-SC-0030	Quick Change	Two buttons	for SOFT/ABRASIVE concrete	30	€ 63,50
	X2B-SC-0050	Quick Change	Two buttons	for SOFT/ABRASIVE concrete	50	€ 63,50
	X2B-SC-0070	Quick Change	Two buttons	for SOFT/ABRASIVE concrete	70	€ 63,50
	X2B-SC-0120	Quick Change	Two buttons	for SOFT/ABRASIVE concrete	120	€ 63,50
	X15-SC-0014	Quick Change	One segment	for SOFT/ABRASIVE concrete	14	€ 49,50
	X15-SC-0030	Quick Change	One segment	for SOFT/ABRASIVE concrete	30	€ 37,50
	X15-SC-0050	Quick Change	One segment	for SOFT/ABRASIVE concrete	50	€ 37,50
	X15-SC-0070	Quick Change	One segment	for SOFT/ABRASIVE concrete	70	€ 37,50
	X15-SC-0120	Quick Change	One segment	for SOFT/ABRASIVE concrete	120	€ 37,50
	X25-SC-0014	Quick Change	Two segments	for SOFT/ABRASIVE concrete	14	€ 82,00
	X25-SC-0030	Quick Change	Two segments	for SOFT/ABRASIVE concrete	30	€ 63,50
	X25-SC-0050	Quick Change	Two segments	for SOFT/ABRASIVE concrete	50	€ 63,50
	X25-SC-0070	Quick Change	Two segments	for SOFT/ABRASIVE concrete	70	€ 63,50
	X25-SC-0120	Quick Change	Two segments	for SOFT/ABRASIVE concrete	120	€ 63,50

MEDIUM CONCRETE

MOHS scale 3-5 - Concrete with a PSI between 2500 and 4000 is considered medium. We recommend to use Grey bond.

	CODE	DESCRIPTION			GRIT	PRICE
	X1B-MC-0014	Quick Change	One button	for MEDIUM concrete	14	€ 43,00
	X1B-MC-0030	Quick Change	One button	for MEDIUM concrete	30	€ 32,00
	X1B-MC-0050	Quick Change	One button	for MEDIUM concrete	50	€ 32,00
	X1B-MC-0070	Quick Change	One button	for MEDIUM concrete	70	€ 32,00
	X1B-MC-0120	Quick Change	One button	for MEDIUM concrete	120	€ 32,00
	X2B-MC-0014	Quick Change	Two buttons	for MEDIUM concrete	14	€ 77,00
	X2B-MC-0030	Quick Change	Two buttons	for MEDIUM concrete	30	€ 52,00
	X2B-MC-0050	Quick Change	Two buttons	for MEDIUM concrete	50	€ 52,00
	X2B-MC-0070	Quick Change	Two buttons	for MEDIUM concrete	70	€ 52,00
	X2B-MC-0120	Quick Change	Two buttons	for MEDIUM concrete	120	€ 52,00
	X15-MC-0014	Quick Change	One segment	for MEDIUM concrete	14	€ 43,00
	X15-MC-0030	Quick Change	One segment	for MEDIUM concrete	30	€ 32,00
	X15-MC-0050	Quick Change	One segment	for MEDIUM concrete	50	€ 32,00
	X15-MC-0070	Quick Change	One segment	for MEDIUM concrete	70	€ 32,00
	X15-MC-0120	Quick Change	One segment	for MEDIUM concrete	120	€ 32,00
	X25-MC-0014	Quick Change	Two segments	for MEDIUM concrete	14	€ 77,00
	X25-MC-0030	Quick Change	Two segments	for MEDIUM concrete	30	€ 52,00
	X25-MC-0050	Quick Change	Two segments	for MEDIUM concrete	50	€ 52,00
	X25-MC-0070	Quick Change	Two segments	for MEDIUM concrete	70	€ 52,00
	X25-MC-0120	Quick Change	Two segments	for MEDIUM concrete	120	€ 52,00

Floor Preparation



HARD CONCRETE

MOHS scale 5-7 - Concrete with a PSI between 4000 and 5000 is considered hard. We recommend to use Red bond.

	CODE	DESCRIPTION			GRIT	PRICE
	X1B-HC-0030	Quick Change	One button	for HARD concrete	30	€ 28,00
	X1B-HC-0050	Quick Change	One button	for HARD concrete	50	€ 28,00
	X1B-HC-0070	Quick Change	One button	for HARD concrete	70	€ 28,00
	X1B-HC-0120	Quick Change	One button	for HARD concrete	120	€ 28,00
	X2B-HC-0014	Quick Change	Two buttons	for HARD concrete	14	€ 68,50
	X2B-HC-0030	Quick Change	Two buttons	for HARD concrete	30	€ 47,00
	X2B-HC-0050	Quick Change	Two buttons	for HARD concrete	50	€ 47,00
	X2B-HC-0070	Quick Change	Two buttons	for HARD concrete	70	€ 47,00
	X1S-HC-0014	Quick Change	One segment	for HARD concrete	14	€ 45,00
	X1S-HC-0030	Quick Change	One segment	for HARD concrete	30	€ 28,00
	X1S-HC-0050	Quick Change	One segment	for HARD concrete	50	€ 28,00
	X1S-HC-0070	Quick Change	One segment	for HARD concrete	70	€ 28,00
	X2S-HC-0014	Quick Change	Two segments	for HARD concrete	14	€ 68,50
	X2S-HC-0030	Quick Change	Two segments	for HARD concrete	30	€ 47,00
	X2S-HC-0050	Quick Change	Two segments	for HARD concrete	50	€ 47,00
	X2S-HC-0070	Quick Change	Two segments	for HARD concrete	70	€ 47,00
	X2S-HC-0120	Quick Change	Two segments	for HARD concrete	120	€ 47,00



VERY HARD CONCRETE

MOHS scale 7-9 - Concrete with a PSI higher than 5500 is considered very hard. We recommend to use Gold bond.

	CODE	DESCRIPTION			GRIT	PRICE
	X1B-HCG-0030	Quick Change	One button	for VERY HARD concrete	30	€ 33,00
	X1B-HCG-0050	Quick Change	One button	for VERY HARD concrete	50	€ 33,00
	X1B-HCG-0070	Quick Change	One button	for VERY HARD concrete	70	€ 33,00
	X1B-HCG-0120	Quick Change	One button	for VERY HARD concrete	120	€ 33,00
	X2B-HCG-0030	Quick Change	Two buttons	for VERY HARD concrete	30	€ 55,50
	X2B-HCG-0050	Quick Change	Two buttons	for VERY HARD concrete	50	€ 55,50
	X2B-HCG-0070	Quick Change	Two buttons	for VERY HARD concrete	70	€ 55,50
	X2B-HCG-0120	Quick Change	Two buttons	for VERY HARD concrete	120	€ 55,50
	X1S-HCG-0030	Quick Change	One segment	for VERY HARD concrete	30	€ 33,00
	X1S-HCG-0050	Quick Change	One segment	for VERY HARD concrete	50	€ 33,00
	X1S-HCG-0070	Quick Change	One segment	for VERY HARD concrete	70	€ 33,00
	X1S-HCG-0120	Quick Change	One segment	for VERY HARD concrete	120	€ 33,00
	X2S-HCG-0030	Quick Change	Two segments	for VERY HARD concrete	30	€ 55,50
	X2S-HCG-0050	Quick Change	Two segments	for VERY HARD concrete	50	€ 55,50
	X2S-HCG-0070	Quick Change	Two segments	for VERY HARD concrete	70	€ 55,50
	X2S-HCG-0120	Quick Change	Two segments	for VERY HARD concrete	120	€ 55,50




EXTRA HARD CONCRETE

MOHS scale 7-9 - Concrete with a PSI over 7000 is considered extra hard. We recommend to use White bond.

	CODE	DESCRIPTION			GRIT	PRICE
	X1S-SHC-0030	Quick Change	One segment	for EXTRA HARD concrete	30	€ 33,00
	X1S-SHC-0050	Quick Change	One segment	for EXTRA HARD concrete	50	€ 33,00
	X1S-SHC-0070	Quick Change	One segment	for EXTRA HARD concrete	70	€ 33,00
	X1S-SHC-0120	Quick Change	One segment	for EXTRA HARD concrete	120	€ 33,00
	X2S-SHC-0030	Quick Change	Two segments	for EXTRA HARD concrete	30	€ 55,50
	X2S-SHC-0050	Quick Change	Two segments	for EXTRA HARD concrete	50	€ 55,50
	X2S-SHC-0070	Quick Change	Two segments	for EXTRA HARD concrete	70	€ 55,50
	X2S-SHC-0120	Quick Change	Two segments	for EXTRA HARD concrete	120	€ 55,50

Floor Preparation

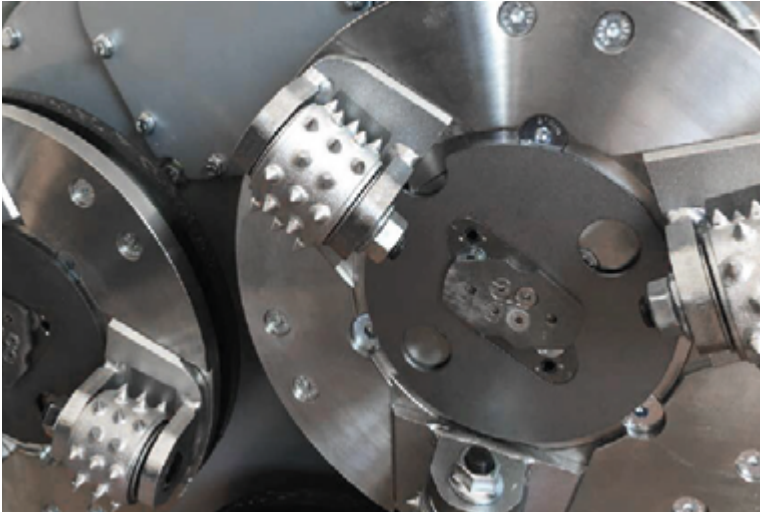

BUSH HAMMER SYSTEM

The bush hammers are aggressive tools for concrete profiling and texturing. They create a very rough surface. Ideal for preparation, as well as for outdoor applications requiring non-slip surfaces.

Each bush hammer roller is attached to our standard Quick Change trapezoid pad that easily slide in and out the tool holder plate.

You can use them on our machines and other grinders using Quick Change adapter plates.

Recommended speed around 500-700 rpm.

Always attach the security rings for safe operation.



BUSH HAMMER

special tooling bsystem suitable for many applications:

- To make safety anti-slip surfaces on marble, granite and natural stones,
- To remove glue, varnish and resin coating.
- To break-down thick coating difficult to remove with normal diamond tools.
- To create "face-see effect" on precast panels".
- To scarify any kind of surface.
- To create orange-peel skin on any surface.

For floor preparation, using Bush Hammer in combination with diamond tools it is possible to prepare in the best way the surface in order to apply correctly the new coating.



CODE	DESCRIPTION	PRICE
X-BH-3	QC Bush hammer tools, Set of 3 pcs + 1 security ring	€ 730,00

Concrete POLISHING

RECOMMENDED RPM

COATING REMOVAL: 550-650 RPM

- ▶ Carbide scrapers
- ▶ Bush hammers
- ▶ PCD Tools

GRINDING: 550-650 RPM

- ▶ Quick Change Metal Bond Tools
- ▶ SA - MB Disks

TRANSITIONING & HONING: 650-750 RPM

- ▶ HD Copper
- ▶ Calibra
- ▶ Corsa Hybrids
- ▶ Resin Tools, 200 - 400 Grit

POLISHING: 800-1100 RPM

- ▶ Resin Tools, 800 - 1800 - 3500 Grit



3-STEP CONCRETE POLISHING SYSTEM

3" pads, featuring a new proprietary resin bond formula and suitable for any type of concrete.


Can be used Wet or Dry on almost any concrete polishing machine, using a velcro plate / tool holder.

The floor should be cut to 120 grit with a metal or hybrid diamond tool and densified, if necessary, before starting with step 1.

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
3S-1	3-Step floor polishing system, Step 1	80mm / 3"	9mm	€ 43,00
3S-2	3-Step floor polishing system, Step 2	80mm / 3"	9mm	€ 43,00
3S-3	3-Step floor polishing system, Step 3	80mm / 3"	9mm	€ 43,00

HD RESIN

Designed for heavier grinders (30" and up). Make sure you add weights if you are using them on lighter machines. Available in 3" and 4" sizes. Velcro connection. **Can be used Wet or Dry.**

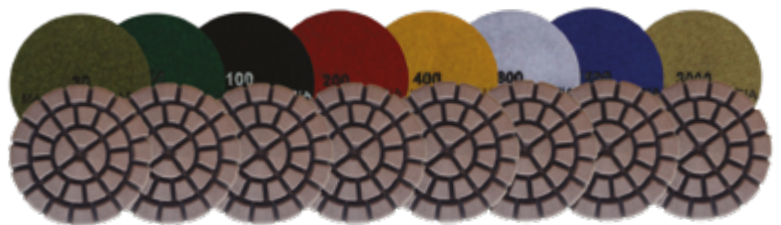

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
HD-3-0030R	HD Resin Pad GRIT 30	80mm / 3"	8mm	€ 38,00
HD-3-0050R	HD Resin Pad GRIT 50	80mm / 3"	8mm	€ 38,00
HD-3-0100R	HD Resin Pad GRIT 100	80mm / 3"	8mm	€ 38,00
HD-3-0200R	HD Resin Pad GRIT 200	80mm / 3"	8mm	€ 38,00
HD-3-0400R	HD Resin Pad GRIT 400	80mm / 3"	8mm	€ 38,00
HD-3-0800R	HD Resin Pad GRIT 800	80mm / 3"	8mm	€ 38,00
HD-3-1500R	HD Resin Pad GRIT 1500	80mm / 3"	8mm	€ 38,00
HD-3-3000R	HD Resin Pad GRIT 3000	80mm / 3"	8mm	€ 38,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
HD-4-0030R	HD Resin Pad GRIT 30	100mm / 4"	8mm	€ 47,00
HD-4-0050R	HD Resin Pad GRIT 50	100mm / 4"	8mm	€ 47,00
HD-4-0100R	HD Resin Pad GRIT 100	100mm / 4"	8mm	€ 47,00
HD-4-0200R	HD Resin Pad GRIT 200	100mm / 4"	8mm	€ 47,00
HD-4-0400R	HD Resin Pad GRIT 400	100mm / 4"	8mm	€ 47,00
HD-4-0800R	HD Resin Pad GRIT 800	100mm / 4"	8mm	€ 47,00
HD-4-1500R	HD Resin Pad GRIT 1500	100mm / 4"	8mm	€ 47,00
HD-4-3000R	HD Resin Pad GRIT 3000	100mm / 4"	8mm	€ 47,00

Concrete POLISHING

HD COPPER

Can be used for the first grinding steps on big box retail projects and provide a fast cut and long tool life. **They should be used Wet only!** Velcro connection.




CODE	DESCRIPTION	SIZE	THICKN.	PRICE
HD-3-CO-0050R	HD Copper pad GRIT 50	80mm/3"	8mm	€ 42,00
HD-3-CO-0100R	HD Copper pad GRIT 100	80mm/3"	8mm	€ 42,00
HD-3-CO-0200R	HD Copper pad GRIT 200	80mm/3"	8mm	€ 42,00
HD-3-CO-0400R	HD Copper pad GRIT 400	80mm/3"	8mm	€ 42,00



3N COPPER

An excellent solution for corner grinding and honing. Available in 4" and 5" sizes. Velcro connection.

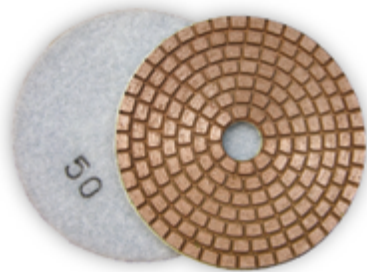


CODE	DESCRIPTION	SIZE	PRICE
3N-4-CO030	3N Copper Pad -Polishing GRIT 30	100mm / 4"	€ 37,50
3N-4-CO050	3N Copper Pad -Polishing GRIT 50	100mm / 4"	€ 37,50
3N-4-CO070	3N Copper Pad -Polishing GRIT 70	100mm / 4"	€ 37,50
3N-4-CO120	3N Copper Pad -Polishing GRIT 120	100mm / 4"	€ 37,50
3N-4-CO220	3N Copper Pad -Polishing GRIT 220	100mm / 4"	€ 37,50

CODE	DESCRIPTION	SIZE	PRICE
3N-5-CO030	3N Copper Pad -Polishing GRIT 30	125mm / 5"	€ 51,50
3N-5-CO050	3N Copper Pad -Polishing GRIT 50	125mm / 5"	€ 51,50
3N-5-CO070	3N Copper Pad -Polishing GRIT 70	125mm / 5"	€ 51,50
3N-5-CO120	3N Copper Pad -Polishing GRIT 120	125mm / 5"	€ 51,50
3N-5-CO220	3N Copper Pad -Polishing GRIT 220	125mm / 5"	€ 51,50

3N HIGH PERFORMANCE POLISHING PAD

The go-to solution for concrete countertop professionals. Featuring a **dry-only High Performance bond**, these pads achieve an exceptionally smooth and even polish on concrete countertops. Available in 4" and 5" sizes. Velcro connection.

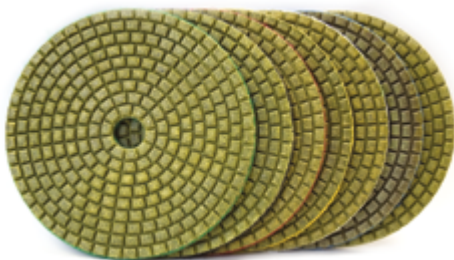

CODE	DESCRIPTION	SIZE	PRICE
3N-HP-4-0050	3N Hi-Perf Pads, Resin GRIT 50	100mm / 4"	€ 29,00
3N-HP-4-0100	3N Hi-Perf Pads, Resin GRIT 100	100mm / 4"	€ 29,00
3N-HP-4-0200	3N Hi-Perf Pads, Resin GRIT 200	100mm / 4"	€ 29,00
3N-HP-4-0400	3N Hi-Perf Pads, Resin GRIT 400	100mm / 4"	€ 29,00
3N-HP-4-0800	3N Hi-Perf Pads, Resin GRIT 800	100mm / 4"	€ 29,00
3N-HP-4-1500	3N Hi-Perf Pads, Resin GRIT 1500	100mm / 4"	€ 29,00
3N-HP-4-3000	3N Hi-Perf Pads, Resin GRIT 3000	100mm / 4"	€ 29,00
3N-HP-4-BUFF	3N Hi-Perf Pads, Resin GRIT BUFF	100mm / 4"	€ 29,00

CODE	DESCRIPTION	SIZE	PRICE
3N-HP-5-0050	3N Hi-Perf Pads, Resin GRIT 50	125mm / 5"	€ 36,50
3N-HP-5-0100	3N Hi-Perf Pads, Resin GRIT 100	125mm / 5"	€ 36,50
3N-HP-5-0200	3N Hi-Perf Pads, Resin GRIT 200	125mm / 5"	€ 36,50
3N-HP-5-0400	3N Hi-Perf Pads, Resin GRIT 400	125mm / 5"	€ 36,50
3N-HP-5-0800	3N Hi-Perf Pads, Resin GRIT 800	125mm / 5"	€ 36,50
3N-HP-5-1500	3N Hi-Perf Pads, Resin GRIT 1500	125mm / 5"	€ 36,50
3N-HP-5-3000	3N Hi-Perf Pads, Resin GRIT 3000	125mm / 5"	€ 36,50
3N-HP-5-BUFF	3N Hi-Perf Pads, Resin GRIT BUFF	125mm / 5"	€ 36,50

CALIBRA CERAMIC PADS

Remove difficult scratches which are left behind by the metal bond grinding steps. Calibra are best for hard and medium concrete applications (their life is shorter on soft or abrasive floors). **Can be used Wet or Dry.**




CODE	DESCRIPTION	SIZE	THICKN.	PRICE
CA3-30	Calibra ceramic pad GRIT 30	80mm / 3"	10mm	€ 47,50
CA3-50	Calibra ceramic pad GRIT 50	80mm / 3"	10mm	€ 47,50
CA3-100	Calibra ceramic pad GRIT 100	80mm / 3"	10mm	€ 47,50
CA3-200	Calibra ceramic pad GRIT 200	80mm / 3"	10mm	€ 47,50

Concrete POLISHING

WAFFEL Polishing Pads

Waffel Polishing Pads features a triple segmented resin ring (3 rows) for use under larger machines. Suitable for hard concrete applications. Waffel polishing pads are ideal for Trowel Shine Polishing System (see pag. 36-37).

Wet&Dry use. Standard velcro attachment.

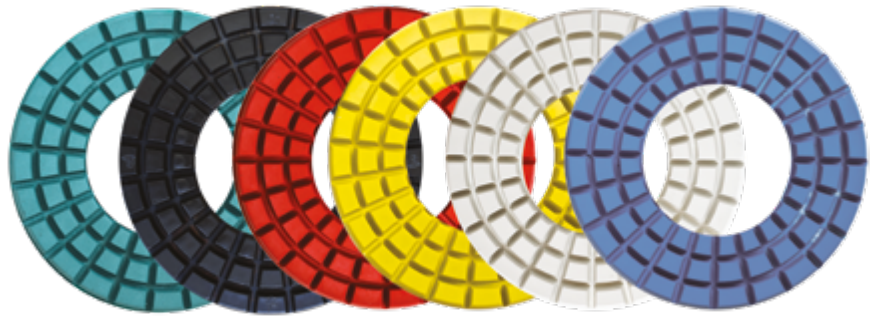

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
WAFF-7-0030D	WAFFEL GRIT 30	175mm/7"	10mm	€ 67,00
WAFF-7-0050D	WAFFEL GRIT 50	175mm/7"	10mm	€ 67,00
WAFF-7-0100D	WAFFEL GRIT 100	175mm/7"	10mm	€ 67,00
WAFF-7-0200D	WAFFEL GRIT 200	175mm/7"	10mm	€ 67,00
WAFF-7-0400D	WAFFEL GRIT 400	175mm/7"	10mm	€ 67,00
WAFF-7-0600D	WAFFEL GRIT 600	175mm/7"	10mm	€ 67,00
WAFF-7-0800D	WAFFEL GRIT 800	175mm/7"	10mm	€ 67,00
WAFF-7-1500D	WAFFEL GRIT 1500	175mm/7"	10mm	€ 67,00
WAFF-7-3000D	WAFFEL GRIT 3000	175mm/7"	10mm	€ 67,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
WAFF-10,63-0030D	WAFFEL GRIT 30	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0050D	WAFFEL GRIT 50	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0100D	WAFFEL GRIT 100	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0200D	WAFFEL GRIT 200	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0400D	WAFFEL GRIT 400	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0600D	WAFFEL GRIT 600	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-0800D	WAFFEL GRIT 800	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-1500D	WAFFEL GRIT 1500	275mm/10,63"	10mm	€ 143,00
WAFF-10,63-3000D	WAFFEL GRIT 3000	275mm/10,63"	10mm	€ 143,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
WAFF-9-0030D	WAFFEL GRIT 30	230mm/9"	10mm	€ 129,00
WAFF-9-0050D	WAFFEL GRIT 50	230mm/9"	10mm	€ 129,00
WAFF-9-0100D	WAFFEL GRIT 100	230mm/9"	10mm	€ 129,00
WAFF-9-0200D	WAFFEL GRIT 200	230mm/9"	10mm	€ 129,00
WAFF-9-0400D	WAFFEL GRIT 400	230mm/9"	10mm	€ 129,00
WAFF-9-0600D	WAFFEL GRIT 600	230mm/9"	10mm	€ 129,00
WAFF-9-0800D	WAFFEL GRIT 800	230mm/9"	10mm	€ 129,00
WAFF-9-1500D	WAFFEL GRIT 1500	230mm/9"	10mm	€ 129,00
WAFF-9-3000D	WAFFEL GRIT 3000	230mm/9"	10mm	€ 129,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
WAFF-14-0030D	WAFFEL GRIT 30	356mm/14"	10mm	€ 182,00
WAFF-14-0050D	WAFFEL GRIT 50	356mm/14"	10mm	€ 182,00
WAFF-14-0100D	WAFFEL GRIT 100	356mm/14"	10mm	€ 182,00
WAFF-14-0200D	WAFFEL GRIT 200	356mm/14"	10mm	€ 182,00
WAFF-14-0400D	WAFFEL GRIT 400	356mm/14"	10mm	€ 182,00
WAFF-14-0600D	WAFFEL GRIT 600	356mm/14"	10mm	€ 182,00
WAFF-14-0800D	WAFFEL GRIT 800	356mm/14"	10mm	€ 182,00
WAFF-14-1500D	WAFFEL GRIT 1500	356mm/14"	10mm	€ 182,00
WAFF-14-3000D	WAFFEL GRIT 3000	356mm/14"	10mm	€ 182,00

WAFFEL QUICK CHANGE Polishing Pads

Waffel Polishing Pads features a triple segmented resin (3 rows) for use under larger machines. Suitable for hard concrete applications.

Wet&Dry use. Quick change attachment.



CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
XQCWF0030D	WAFFEL GRIT 30	standard	10mm	€ 38,50
XQCWF0050D	WAFFEL GRIT 50	standard	10mm	€ 38,50
XQCWF0100D	WAFFEL GRIT 100	standard	10mm	€ 38,50
XQCWF0200D	WAFFEL GRIT 200	standard	10mm	€ 38,50
XQCWF0400D	WAFFEL GRIT 400	standard	10mm	€ 38,50
XQCWF0800D	WAFFEL GRIT 800	standard	10mm	€ 38,50
XQCWF1500D	WAFFEL GRIT 1500	standard	10mm	€ 38,50

Concrete POLISHING



V-HARR Premium Polishing Pads

V-HARR Pads are the most versatile and popular polishing pads, designed for mechanically restoring and polishing concrete. V-HARR is also ideal for terrazzo and hard stone floors and will produce remarkable gloss results on black granite when used wet. Available also velcro attachment in many popular sizes for use with any planetary polisher (80mm / 3" - 127mm / 5" - 175mm / 7"). V-HARR Grit 1800 (Dry use) is ideal during Trowel Shine System after using Concrete Hard Lithium (see pag. 26-27). Velcro attachment. **Dry use is strongly recommended for concrete applications.**

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
VF-9-0050	V-HARR Polishing pad	GRIT 50	230mm / 9"	€ 92,00
VF-9-0120	V-HARR Polishing pad	GRIT 120	230mm / 9"	€ 92,00
VF-9-0220	V-HARR Polishing pad	GRIT 220	230mm / 9"	€ 92,00
VF-9-0400	V-HARR Polishing pad	GRIT 400	230mm / 9"	€ 92,00
VF-9-0800	V-HARR Polishing pad	GRIT 800	230mm / 9"	€ 92,00
VF-9-1800	V-HARR Polishing pad	GRIT 1800	230mm / 9"	€ 92,00
VF-9-3500	V-HARR Polishing pad	GRIT 3500	230mm / 9"	€ 92,00
VF-9-BUFF	V-HARR Polishing pad	GRIT BUFF	230mm / 9"	€ 92,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
VF-10,63-0050	V-HARR Polishing pad	GRIT 50	275mm/10,63"	€ 110,00
VF-10,63-0120	V-HARR Polishing pad	GRIT 120	275mm/10,63"	€ 110,00
VF-10,63-0220	V-HARR Polishing pad	GRIT 220	275mm/10,63"	€ 110,00
VF-10,63-0400	V-HARR Polishing pad	GRIT 400	275mm/10,63"	€ 110,00
VF-10,63-0800	V-HARR Polishing pad	GRIT 800	275mm/10,63"	€ 110,00
VF-10,63-1800	V-HARR Polishing pad	GRIT 1800	275mm/10,63"	€ 110,00
VF-10,63-3500	V-HARR Polishing pad	GRIT 3500	275mm/10,63"	€ 110,00
VF-10,63-BUFF	V-HARR Polishing pad	GRIT BUFF	275mm/10,63"	€ 110,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
VF-13,5-0220	V-HARR Polishing pad	GRIT 220	335mm / 13,5"	€ 134,00
VF-13,5-0400	V-HARR Polishing pad	GRIT 400	335mm / 13,5"	€ 134,00
VF-13,5-0800	V-HARR Polishing pad	GRIT 800	335mm / 13,5"	€ 134,00
VF-13,5-1800	V-HARR Polishing pad	GRIT 1800	335mm / 13,5"	€ 134,00
VF-13,5-3500	V-HARR Polishing pad	GRIT 3500	335mm / 13,5"	€ 134,00
VF-13,5-BUFF	V-HARR Polishing pad	GRIT BUFF	335mm / 13,5"	€ 134,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
VF-14-0220	V-HARR Polishing pad	GRIT 220	356mm/14"	€ 140,00
VF-14-0400	V-HARR Polishing pad	GRIT 400	356mm/14"	€ 140,00
VF-14-0800	V-HARR Polishing pad	GRIT 800	356mm/14"	€ 140,00
VF-14-1800	V-HARR Polishing pad	GRIT 1800	356mm/14"	€ 140,00
VF-14-3500	V-HARR Polishing pad	GRIT 3500	356mm/14"	€ 140,00
VF-14-BUFF	V-HARR Polishing pad	GRIT BUFF	356mm/14"	€ 140,00

V-HARR QUICK CHANGE Premium Polishing Pads



V-HARR QUICK CHANGE 9"

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
XQCVF0120	V-HARR Quick change	GRIT 120	XQC 9	€ 31,00
XQCVF0220	V-HARR Quick change	GRIT 220	XQC 9	€ 31,00
XQCVF0400	V-HARR Quick change	GRIT 400	XQC 9	€ 31,00
XQCVF0800	V-HARR Quick change	GRIT 800	XQC 9	€ 31,00
XQCVF1800	V-HARR Quick change	GRIT 1800	XQC 9	€ 31,00
XQCVF3500	V-HARR Quick change	GRIT 3500	XQC 9	€ 31,00
XQCVFBUFF	V-HARR Quick change	GRIT BUFF	XQC 9	€ 31,00



V-HARR QUICK CHANGE 13"

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
XQC13VF0220	V-HARR Quick change	GRIT 220	XQC 13	€ 23,00
XQC13VF0400	V-HARR Quick change	GRIT 400	XQC 13	€ 23,00
XQC13VF0800	V-HARR Quick change	GRIT 800	XQC 13	€ 23,00
XQC13VF1800	V-HARR Quick change	GRIT 1800	XQC 13	€ 23,00
XQC13VF3500	V-HARR Quick change	GRIT 3500	XQC 13	€ 23,00
XQC13VFBUFF	V-HARR Quick change	GRIT BUFF	XQC 13	€ 23,00

Concrete POLISHING

NATO CONCRETE

Wet and Dry Polishing Pads with wide channels and patented design allow to work on a cleaner surface, ensuring a quality polish. High quality, long lasting resin bond, can be used with all floor grinding machines with velcro connection. NATO pads feature a thick 12mm layer of resin and diamonds for extra long life.

- Available in 50, 100, 200, 400, 800, 1500 and 3000 Grit Polishing Discs
- Wide channels quickly clear out slurry or dust
- Available in 3" or 4" sizes and Velcro backing for quick change
- Thick 12 MM Layer of Resin and Diamonds result in Longer Lifespan compared to other polishing discs
- One of our most popular resin polishing pads for concrete applications
- Every NATO pad is appropriate for all concrete grinding/polishing applications
- Offered in wet and dry bond formulations



CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
NS-0050D	NATO Concrete GRIT 50	80mm / 3"	12mm	€ 29,00
NS-0100D	NATO Concrete GRIT 100	80mm / 3"	12mm	€ 29,00
NS-0200D	NATO Concrete GRIT 200	80mm / 3"	12mm	€ 29,00
NS-0400D	NATO Concrete GRIT 400	80mm / 3"	12mm	€ 29,00
NS-0600D	NATO Concrete GRIT 600	80mm / 3"	12mm	€ 29,00
NS-0800D	NATO Concrete GRIT 800	80mm / 3"	12mm	€ 29,00
NS-1500D	NATO Concrete GRIT 1500	80mm / 3"	12mm	€ 29,00
NS-3000D	NATO Concrete GRIT 3000	80mm / 3"	12mm	€ 29,00

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
NS-4-0050D	NATO Concrete GRIT 50	100mm / 4"	12mm	€ 38,00
NS-4-0100D	NATO Concrete GRIT 100	100mm / 4"	12mm	€ 38,00
NS-4-0200D	NATO Concrete GRIT 200	100mm / 4"	12mm	€ 38,00
NS-4-0400D	NATO Concrete GRIT 400	100mm / 4"	12mm	€ 38,00
NS-4-0600D	NATO Concrete GRIT 600	100mm / 4"	12mm	€ 38,00
NS-4-0800D	NATO Concrete GRIT 800	100mm / 4"	12mm	€ 38,00
NS-4-1500D	NATO Concrete GRIT 1500	100mm / 4"	12mm	€ 38,00
NS-4-3000D	NATO Concrete GRIT 3000	100mm / 4"	12mm	€ 38,00

VELCRO PAD HOLDER

Velcro Pad Holder for resin tools and floor pads.



CODE	DESCRIPTION	PRICE
XQC-PH-9	Quick change Velcro Pad Holder for 230mm / 9" Kit 9 pcs	€ 172,00
XQC-PH-13	Quick change Velcro Pad Holder for 330mm / 13" Kit 18 pcs	€ 276,00

ALUMINUM HOLDERS

Aluminum Lippage Holders for velcro-backed tools. Sizes available: 100mm / 4" and 80mm / 3". Quick Change attachment to be used with Lavina Quick Change plates.



CODE	DESCRIPTION	SIZE	PRICE
XQC-4LH	Quick Change Aluminum Lippage Holder	100mm / 4"	€ 57,60
XQC-83LH	Quick Change Aluminum Lippage Holder	80mm / 3"	€ 45,50

CAMLOCK CONNECTION



CODE	DESCRIPTION	PRICE
30316000059	Camlock connection for L20	€ 21,50
C250-AL	Camlock connection for L25	€ 50,50
A67.00.00	Camlock connection for L30L	€ 64,00
30316000044	Camlock connection for L32	€ 39,00

Marble & Natural Stone

SA SUPERTHICK Metal Bond

Suitable for grinding concrete, natural stone, self-leveling and terrazzo floors! The SA metal discs provide a great first cut with a smooth and refined scratch pattern. Available also Velcro connection. **Only wet use.** XQC Grit 30 Terrazzo bond Euro 129,00.

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
XQC-SA-046MB	SA Superthick disc GRIT 46	80mm / 3"	4mm	€ 119,00
XQC-SA-070MB	SA Superthick disc GRIT 70	80mm / 3"	4mm	€ 119,00
XQC-SA-120MB	SA Superthick disc GRIT 120	80mm / 3"	4mm	€ 119,00
XQC-SA-220MB	SA Superthick disc GRIT 220	80mm / 3"	4mm	€ 119,00



SPIRAL Polishing Pads

The undisputed solution for polishing natural stone floors. Both spiral patterns enable water to efficiently dispose of slurry, keeping the working surface clean. The standard spiral pattern is designed for medium to softer stones, such as marble, travertine, onyx and limestone. The wide channel pattern with a larger footprint is more appropriate for harder stone such as granite. Only wet system. Velcro connection.

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
10-3-0030	Spiral Polishing Pad GRIT 30	80mm / 3"	6mm	€ 24,00
10-3-0050	Spiral Polishing Pad GRIT 50	80mm / 3"	6mm	€ 24,00
10-3-0120	Spiral Polishing Pad GRIT 120	80mm / 3"	6mm	€ 24,00
10-3-0220	Spiral Polishing Pad GRIT 220	80mm / 3"	6mm	€ 24,00
10-3-0400	Spiral Polishing Pad GRIT 400	80mm / 3"	6mm	€ 24,00
10-3-0800	Spiral Polishing Pad GRIT 800	80mm / 3"	6mm	€ 24,00
10-3-1800	Spiral Polishing Pad GRIT 1800	80mm / 3"	6mm	€ 24,00
10-3-3500	Spiral Polishing Pad GRIT 3500	80mm / 3"	6mm	€ 24,00
10-3-8500	Spiral Polishing Pad GRIT 8500	80mm / 3"	6mm	€ 24,00



NATO STONE Polishing Pads

Resin bond diamond tools for grinding, polishing and restoration of marble and natural stone. Wide channels and patented design allow to work on a cleaner surface, ensuring a quality polish. NATO pads feature a thick 12mm layer of resin and diamonds for extra long life. High quality, long lasting resin bond, can be used with all floor grinding machines with velcro connection. We recommend a minimum of 3 discs per head for optimum performance. **Only WET use.**

CODE	DESCRIPTION	SIZE	THICKNESS	PRICE
NS-0030	NATO Stone GRIT 30	80mm / 3"	12mm	€ 30,00
NS-0050	NATO Stone GRIT 50	80mm / 3"	12mm	€ 30,00
NS-0100	NATO Stone GRIT 100	80mm / 3"	12mm	€ 30,00
NS-0200	NATO Stone GRIT 200	80mm / 3"	12mm	€ 30,00
NS-0400	NATO Stone GRIT 400	80mm / 3"	12mm	€ 30,00
NS-0600	NATO Stone GRIT 600	80mm / 3"	12mm	€ 30,00
NS-0800	NATO Stone GRIT 800	80mm / 3"	12mm	€ 30,00
NS-1500	NATO Stone GRIT 1500	80mm / 3"	12mm	€ 30,00
NS-3000	NATO Stone GRIT 3000	80mm / 3"	12mm	€ 30,00



Diamond Polishing Pads

SHINEPRO PLUS Diamond Floor Pads

High Flexibility - High Performance - Heavy Duty

ShinePro Plus polishing pads are an efficient and versatile solution for floor restoration and maintenance and provide outstanding results on polished Concrete, Marble, Terrazzo, Ceramic, Klinker floors, Natural stone, PVC, Rubber, Vinyl, Epoxy and Wooden floors. **Only water!**

- Standard **velcro connection** for a quick and easy tool attachment
- Offered in all popular **sizes from 125mm up to 510mm**.
- Easy to use with standard single disc machine or with Orbital machines
- Available in several **Grit range from 50 to 3500**



CODE	DESCRIPTION	SIZE	PRICE
SPP-5-0050	SHINEPRO PLUS GRIT 50	125mm / 5"	€ 24,00
SPP-5-0120	SHINEPRO PLUS GRIT 120	125mm / 5"	€ 24,00
SPP-5-0220	SHINEPRO PLUS GRIT 220	125mm / 5"	€ 24,00
SPP-5-0400	SHINEPRO PLUS GRIT 400	125mm / 5"	€ 24,00
SPP-5-0800	SHINEPRO PLUS GRIT 800	125mm / 5"	€ 24,00
SPP-5-1800	SHINEPRO PLUS GRIT 1800	125mm / 5"	€ 24,00
SPP-5-3500	SHINEPRO PLUS GRIT 3500	125mm / 5"	€ 24,00
SPP-9-0050	SHINEPRO PLUS GRIT 50	230mm / 9"	€ 53,00
SPP-9-0120	SHINEPRO PLUS GRIT 120	230mm / 9"	€ 53,00
SPP-9-0220	SHINEPRO PLUS GRIT 220	230mm / 9"	€ 53,00
SPP-9-0400	SHINEPRO PLUS GRIT 400	230mm / 9"	€ 53,00
SPP-9-0800	SHINEPRO PLUS GRIT 800	230mm / 9"	€ 53,00
SPP-9-1800	SHINEPRO PLUS GRIT 1800	230mm / 9"	€ 53,00
SPP-9-3500	SHINEPRO PLUS GRIT 3500	230mm / 9"	€ 53,00
SPP-13-0050	SHINEPRO PLUS GRIT 50	330mm / 13"	€ 93,00
SPP-13-0120	SHINEPRO PLUS GRIT 120	330mm / 13"	€ 93,00
SPP-13-0220	SHINEPRO PLUS GRIT 220	330mm / 13"	€ 93,00
SPP-13-0400	SHINEPRO PLUS GRIT 400	330mm / 13"	€ 93,00
SPP-13-0800	SHINEPRO PLUS GRIT 800	330mm / 13"	€ 93,00
SPP-13-1800	SHINEPRO PLUS GRIT 1800	330mm / 13"	€ 93,00
SPP-13-3500	SHINEPRO PLUS GRIT 3500	330mm / 13"	€ 93,00

CODE	DESCRIPTION	SIZE	PRICE
SPP-14-0050	SHINEPRO PLUS GRIT 50	356mm / 14"	€ 102,00
SPP-14-0120	SHINEPRO PLUS GRIT 120	356mm / 14"	€ 102,00
SPP-14-0220	SHINEPRO PLUS GRIT 220	356mm / 14"	€ 102,00
SPP-14-0400	SHINEPRO PLUS GRIT 400	356mm / 14"	€ 102,00
SPP-14-0800	SHINEPRO PLUS GRIT 800	356mm / 14"	€ 102,00
SPP-14-1800	SHINEPRO PLUS GRIT 1800	356mm / 14"	€ 102,00
SPP-14-3500	SHINEPRO PLUS GRIT 3500	356mm / 14"	€ 102,00
SPP-17-0050	SHINEPRO PLUS GRIT 50	430mm / 17"	€ 115,00
SPP-17-0120	SHINEPRO PLUS GRIT 120	430mm / 17"	€ 115,00
SPP-17-0220	SHINEPRO PLUS GRIT 220	430mm / 17"	€ 115,00
SPP-17-0400	SHINEPRO PLUS GRIT 400	430mm / 17"	€ 115,00
SPP-17-0800	SHINEPRO PLUS GRIT 800	430mm / 17"	€ 115,00
SPP-17-1800	SHINEPRO PLUS GRIT 1800	430mm / 17"	€ 115,00
SPP-17-3500	SHINEPRO PLUS GRIT 3500	430mm / 17"	€ 115,00
SPP-20-0050	SHINEPRO PLUS GRIT 50	510mm / 20"	€ 179,00
SPP-20-0120	SHINEPRO PLUS GRIT 120	510mm / 20"	€ 179,00
SPP-20-0220	SHINEPRO PLUS GRIT 220	510mm / 20"	€ 179,00
SPP-20-0400	SHINEPRO PLUS GRIT 400	510mm / 20"	€ 179,00
SPP-20-0800	SHINEPRO PLUS GRIT 800	510mm / 20"	€ 179,00
SPP-20-1800	SHINEPRO PLUS GRIT 1800	510mm / 20"	€ 179,00
SPP-20-3500	SHINEPRO PLUS GRIT 3500	510mm / 20"	€ 179,00

SHINEPRO SCREEN

Flexible Electroplated Screen

ShinePro Screen flexible Electroplated Screens ideal for aggressive cleaning, spot repair and floor restoration. Screens **Grit 220 and 400 are very aggressive** and designed for hard floors. The **Grit 600 is ideal for a satin smooth surface** effect. Suitable for compact grinders for smaller areas, burnisher or auto scrubbers up to 350 rpm for large areas. The ShinePro Screens system offers outstanding results and cost savings, extending the life of daily maintenance, reducing working times and consumption of chemicals.



CODE	DESCRIPTION	SIZE	PRICE
DS-13W-0220	SHINEPRO SCREEN GRIT 220	330mm / 13"	€ 125,00
DS-13W-0400	SHINEPRO SCREEN GRIT 400	330mm / 13"	€ 96,50
DS-13W-0600	SHINEPRO SCREEN GRIT 600	330mm / 13"	€ 70,00
DS-14W-0220	SHINEPRO SCREEN GRIT 220	356mm / 14"	€ 144,00
DS-14W-0400	SHINEPRO SCREEN GRIT 400	356mm / 14"	€ 120,00
DS-14W-0600	SHINEPRO SCREEN GRIT 600	356mm / 14"	€ 82,00
DS-17W-0220	SHINEPRO SCREEN GRIT 220	430mm / 17"	€ 178,00
DS-17W-0400	SHINEPRO SCREEN GRIT 400	430mm / 17"	€ 142,00
DS-17W-0600	SHINEPRO SCREEN GRIT 600	430mm / 17"	€ 99,00

CODE	DESCRIPTION	SIZE	PRICE
DS-20W-0220	SHINEPRO SCREEN GRIT 220	510mm / 20"	€ 218,00
DS-20W-0400	SHINEPRO SCREEN GRIT 400	510mm / 20"	€ 167,00
DS-20W-0600	SHINEPRO SCREEN GRIT 600	510mm / 20"	€ 133,00
DS-21W-0220	SHINEPRO SCREEN GRIT 220	540mm / 21"	€ 230,00
DS-21W-0400	SHINEPRO SCREEN GRIT 400	540mm / 21"	€ 183,00
DS-21W-0600	SHINEPRO SCREEN GRIT 600	540mm / 21"	€ 144,00
DS-27W-0400	SHINEPRO SCREEN GRIT 400	685mm / 27"	€ 234,00
DS-27W-0600	SHINEPRO SCREEN GRIT 600	685mm / 27"	€ 225,00

SUPRASHINE

advantages



THE MOST COMPLETE & EFFECTIVE RANGE OF PADS FOR FLOOR RESTORATION AND MAINTENANCE

No special equipment needed. Compatible with most low-speed and high-speed floor machines (buffers, autoscrubbers, burnishers, etc). Use with velcro pad holder for best results. No chemicals required. Use only water. Simple and easy process to save you time and money.

FAST RESULTS WITH MINIMUM EFFORT.


Floor maintenance



SUPRASHINE MAINTENANCE

Efficient and versatile. Professional range of pads with flexible material to deep clean, upgrade and maintain all types of coated and uncoated, hard and resilient floors. Offered in all popular sizes from 5" to 28" diameter. Also available in rectangular shapes. **Minimum order 10 pcs of each grit.**


CODE	DESCRIPTION	SIZE	PRICE
SRG-0400-17	SUPRASHINE 400 GRIT, RED	432mm/17"	€ 38,50
SRG-0800-17	SUPRASHINE 800 GRIT, WHITE	432mm/17"	€ 38,50
SRG-1800-17	SUPRASHINE 1800 GRIT, YELLOW	432mm/17"	€ 38,50
SRG-3500-17	SUPRASHINE 3500 GRIT, GREEN	432mm/17"	€ 38,50
SRG-8000-17	SUPRASHINE 8000 GRIT, SILVER	432mm/17"	€ 38,50
SRG-0400-20	SUPRASHINE 400 GRIT, RED	508mm/20"	€ 44,50
SRG-0800-20	SUPRASHINE 800 GRIT, WHITE	508mm/20"	€ 44,50
SRG-1800-20	SUPRASHINE 1800 GRIT, YELLOW	508mm/20"	€ 44,50
SRG-3500-20	SUPRASHINE 3500 GRIT, GREEN	508mm/20"	€ 44,50
SRG-8000-20	SUPRASHINE 8000 GRIT, SILVER	508mm/20"	€ 44,50
SRG-0400-27	SUPRASHINE 400 GRIT, RED	686mm 27"	€ 80,50
SRG-0800-27	SUPRASHINE 800 GRIT, WHITE	686mm 27"	€ 80,50
SRG-1800-27	SUPRASHINE 1800 GRIT, YELLOW	686mm 27"	€ 80,50
SRG-3500-27	SUPRASHINE 3500 GRIT, GREEN	686mm 27"	€ 80,50
SRG-8000-27	SUPRASHINE 8000 GRIT, SILVER	686mm 27"	€ 80,50

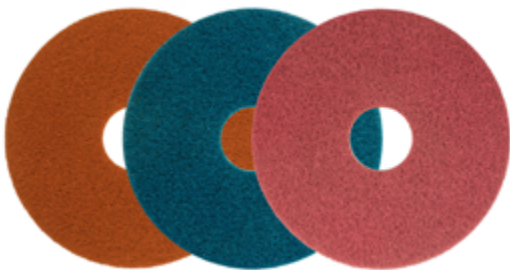

SUPRASHINE HP HIGH PERFORMANCE

A dedicated range of HIGH PERFORMANCE pads with flexible material for daily maintenance of HIGH TRAFFIC floors. Also, use to upgrade any floor during daily maintenance. Offered in all popular sizes from 5" to 28" diameter. Also available in rectangular shapes. **Minimum order 10 pcs of each grit.**

CODE	DESCRIPTION	SIZE	PRICE
SHP-0800-17	SUPRASHINE HP 800 GRIT, ORANGE	432mm/ 17"	€ 53,50
SHP-1800-17	SUPRASHINE HP 1800 GRIT, BLUE	432mm/ 17"	€ 53,50
SHP-3500-17	SUPRASHINE HP 3500 GRIT, PINK	432mm/ 17"	€ 53,50
SHP-0800-20	SUPRASHINE HP 800 GRIT, ORANGE	508mm/ 20"	€ 62,00
SHP-1800-20	SUPRASHINE HP 1800 GRIT, BLUE	508mm/ 20"	€ 62,00
SHP-3500-20	SUPRASHINE HP 3500 GRIT, PINK	508mm/ 20"	€ 62,00
SHP-0800-27	SUPRASHINE HP 800 GRIT, ORANGE	686mm/ 27"	€ 112,50
SHP-1800-27	SUPRASHINE HP 1800 GRIT, BLUE	686mm/ 27"	€ 112,50
SHP-3500-27	SUPRASHINE HP 3500 GRIT, PINK	686mm/ 27"	€ 112,50

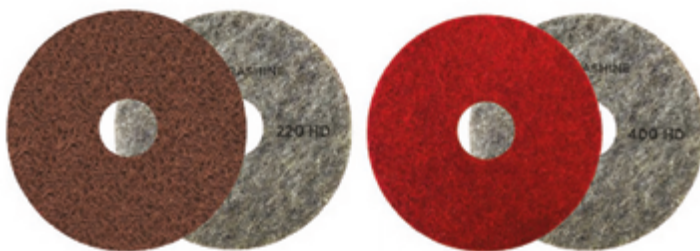


SUPRASHINE HD HEAVY DUTY PADS

SupraShine HD tough material is ideal for surface preparation and chemical-free stripping **with water only**. Offered in all popular sizes from 5" to 28" diameter. Also available in rectangular shapes. **Minimum order 10 pcs of each grit.**

CODE	DESCRIPTION	SIZE	PRICE
SHD-0220-17	SUPRASHINE HD 220 GRIT, BROWN	432mm/ 17"	€ 38,50
SHD-0400-17	SUPRASHINE HD 400 GRIT, RED	432mm/ 17"	€ 38,50
SHD-0220-20	SUPRASHINE HD 220 GRIT, BROWN	508mm/20"	€ 44,50
SHD-0400-20	SUPRASHINE HD 400 GRIT, RED	508mm/20"	€ 44,50
SHD-0220-27	SUPRASHINE HD 220 GRIT, BROWN	686mm/27"	€ 80,50
SHD-0400-27	SUPRASHINE HD 400 GRIT, RED	686mm/27"	€ 80,50

SUPRASHINE HYBRID TOOLS

A complete range of tools from 50 to 400 grit designed to restore surfaces - eliminate stains, scratches and orange peel, and achieve a smooth surface. Suitable for use on concrete, terrazzo and natural stone. Attach the 5-inch Hybrids to a standard pad. **Use with low-speed machines and water only. Minimum order 5 pcs of each grit.**

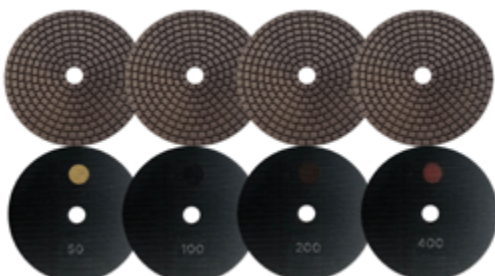

CODE	DESCRIPTION	SIZE	PRICE
SHB-050-5	SUPRASHINE HYBRID 50 GRIT, GOLD	127mm/ 5"	€ 38,50
SHB-100-5	SUPRASHINE HYBRID 100 GRIT, BLACK	127mm/ 5"	€ 38,50
SHB-200-5	SUPRASHINE HYBRID 200 GRIT, BROWN	127mm/ 5"	€ 38,50
SHB-400-5	SUPRASHINE HYBRID 400 GRIT, RED	127mm/ 5"	€ 38,50

Floor maintenance

USING SUPRASHINE WITH **LOW-SPEED MACHINES**

SCRUBBER-DRYER, SINGLE-DISC/BUFFER



Unless it is an extreme case, we recommend the use of only water (without chemicals) to grind, restore, strip, clean, upgrade or maintain all floors.

DAILY MAINTENANCE

Very Soft Coatings
Delicate Surfaces
Highgloss Porcelain



MAX GLOSS

8000

ALL AROUND DAILY MAINTENANCE

Medium / Hard Coatings
Pvc
Vinyl
Rubber
Natural Wood



3500

ALL AROUND DAILY MAINTENANCE

Matt Pvc
Vinyl
Rubber



1800

DEEP CLEANING

PVC
Vinyl
Rubber
Natural Wood
Top Scrub All Coatings



800

VERY DEEP CLEANING

Porous Ceramic Tiles
Matt Porcelain
Granite



400

Restoration:

Epoxy / Resin
Vinyl
Pvc With Damaged Pur

200

100

50

SUPRASHINE HP HIGH PERFORMANCE PADS

DAILY GLOSS UPGRADE & MAINTENANCE VERY HIGH GLOSS

Polished Concrete
Terrazzo, Epoxy (Resin & Terrazzo)
Marble, Granite,
Ceramic Tiles

DAILY GLOSS UPGRADE & MAINTENANCE - HIGH GLOSS

Polished Concrete
Terrazzo, Epoxy (Resin & Terrazzo)
Marble, Granite,
Ceramic Tiles

DAILY GLOSS UPGRADE & MAINTENANCE - LOW GLOSS

Porous Ceramic Tiles
Matt Porcelain

DEEP CLEANING ALL FLOORS

SUPRASHINE HD HEAVY DUTY PADS



PREP, STRIP, HONE

HYBRIDS



RESTORATION


Concrete
Terrazzo
Stone

HONING

GRINDING

USING SUPRASHINE WITH **HI-SPEED MACHINES**

BURNISHER
AS A POWERFUL POLISHING TOOL



Preferably with slightly wet pads to Eliminate dust, achieve cleaning effect, improve pad life and gloss quality.

DAILY & PERIODIC BURNISHING PAD TO PUMP UP THE GLOSS

All Coated &
Uncoated Floors
Flexible Material



MAX GLOSS

8000

GLOSS UPGRADE LEVEL 3

Uncoated Floors
Flexible Pad Material



3500

GLOSS UPGRADE LEVEL 2

Uncoated Floors
Flexible Pad Material



1800

GLOSS UPGRADE LEVEL 1

Uncoated Floors
Flexible Pad Materials



800

SURFACE PREP

Uncoated Floors
Flexible Pad Material



400

200

SUPRASHINE HP HIGH PERFORMANCE PADS

GLOSS UPGRADE, LEVEL 3

Uncoated Floors
Flexible Material
Faster & Higher Gloss
Longer Lifespan



GLOSS UPGRADE, LEVEL 2

Uncoated Floors
Flexible Material
Faster & Higher Gloss
Longer Lifespan



GLOSS UPGRADE, LEVEL 1

Uncoated Floors
Flexible Material
Faster & Higher Gloss
Longer Lifespan



SUPRASHINE HD HEAVY DUTY PADS

SURFACE PREP, HONING

Uncoated Floors
Heavy-duty Material

